


Dual Nozzle Cold Air Gun

Models 612, 622, 632

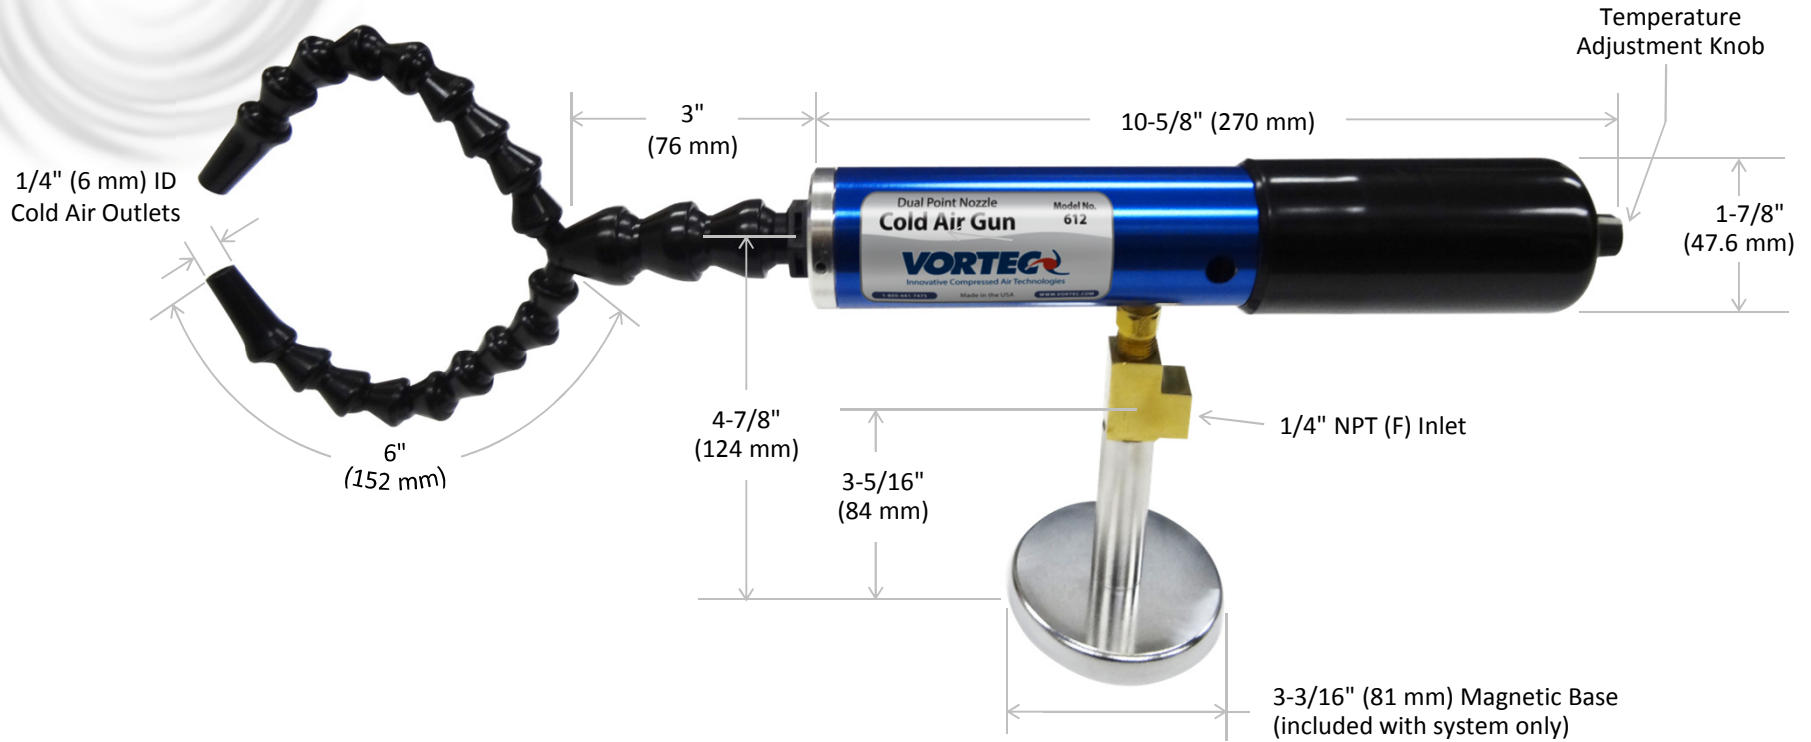

SPECIFICATIONS													
Model No.		Cooling Capacity		Air Consumption		Min. Temp. Achieved		Outlet Air Flow Rate		Weight			
								(Total both nozzles)		System		Gun only	
System ¹	Gun only	Btu/h	Watts	SCFM	SLPM	deg F	deg C	SCFM	SLPM	lb	kg	lb	kg
612	612-1	900	264	15	425	-5	-15	2-15	57-425	3.0	1.4	1.0	0.5
622	622-1	1500	440	25	708	15	-9	8-25	227-708	3.0	1.4	1.0	0.5
632	632-1	2500	733	35	990	25	-4	15-35	425-990	3.0	1.4	1.0	0.5

¹ System includes magnetic base and compressed air filter.
 Note: Specifications are for 100 psig (6.9 bar) and 70°F (21°C) compressed air



An ITW Company
 10125 Carver Road
 Cincinnati, OH 45242

1-800-441-7475
 sales@vortec.com
 www.vortec.com